


CTS 2200

PNEUMATIC STEEL STRAPPING TOOL WITH SEAL JOINT

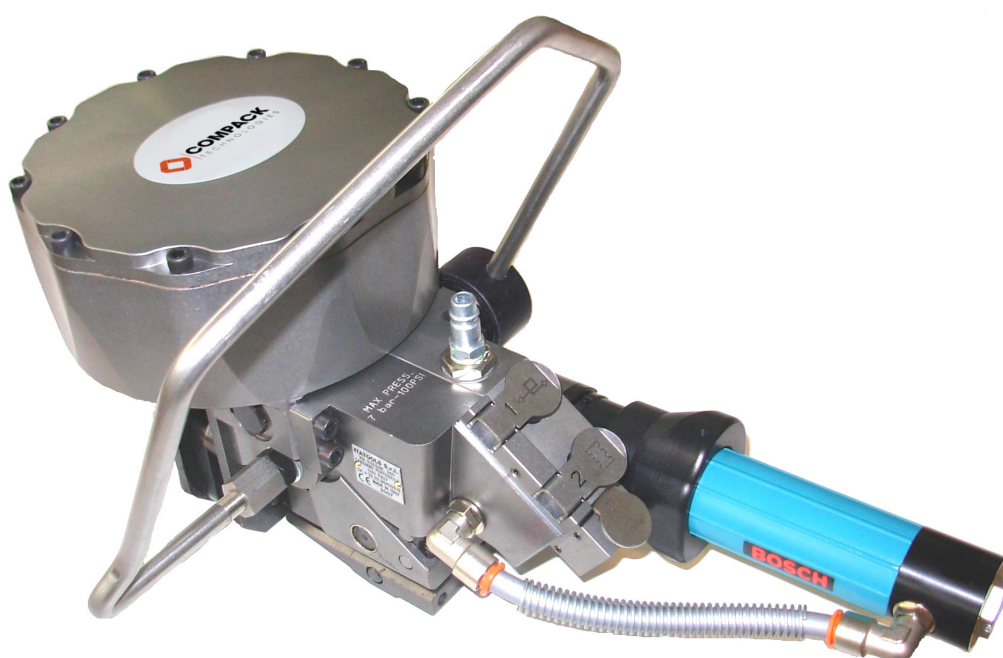

MODEL

CODE	TYPE	STRAP	THICKNESS
C2219610	CTS 2200 -19 mm - 3/4" - 9000N - 2B	R 850 N/mm2	0.6 - 1.00 mm • 0.024" - 0.039"
		R 1100 N/mm2	0.63 - 0.8 mm • 0.025" - 0.031"
C2225610	CTS 2200 25 mm - 1" - 9000N - 2B	R 850 N/mm2	0.6 - 1.00 mm • 0.024" - 0.039"
		R 1100 N/mm2	0.63 - 0.8 mm • 0.025" - 0.031"
C2232610	CTS 2200 32 mm - 1 1/4" - 9000N - 2B	R 850 N/mm2	0.6 - 1.00 mm • 0.024" - 0.039"
		R 1100 N/mm2	0.63 - 0.8 mm • 0.025" - 0.031"

TECHNICAL SPECIFICATIONS

DIMENSIONS

Length	430 mm • 16.9"
Width	260 mm • 10.2"
Height	310 mm • 12.2"
Weight	10.3 kgs • 22.6 lbs

FEEDING

Pressure Range	5.5 - 7 bar • 78 - 99 psi
Air Consumption	12 L/s – 25 cufi/min

PERFORMANCE

Max. tension force	9000 N - 6.5 bar - 92 psi
Tensioning Speed	6 mt/m
Sealing	seal double notches
Joint strength	80% of strap strength*

* variable according to strap type

SEAL DOUBLE NOTCHES



Compack Technologies
15th Floor, Suite#1500 -701 West Georgia St.
Vancouver, BC, V7Y 1C6
Canada
T: +1 (604) 801-5922
F: +1 (604) 801-5911
www.compacktechnologies.com

COMPACT
TECHNOLOGIES